

PRESIDENT

LINCOLN II

MULTI
COLOR
DISPLAY



2+3* years
warranty

PRESIDENT



BACK TO THE FUTURE

AM / FM / USB / LSB / CW • DIN Format
VFO - Continuous frequency variation (push/pull)
Personalization menu: overvoltage protection...
6 memories and many features to discover....

nevada®

email: phil@nevada.co.uk

tel: 023 9231 3095

Unit 1 Fitzherbert Spur
Farlington
Portsmouth PO6 1TT




*See warranty conditions on our website: www.president-electronics.com



MENUS
 Roger Beep Frequency *rbEEPfr*
 Roger Beep Time *rbEEPt*
 Cw Frequency *CUtoFr*
 Call Frequency *CALL Fr*
 Monitor Gain Volume *MontrNo*
 Tot (time Out Timer) *tot*
 Swr Protection *ESr*
 Swr Protection Setting *SJUrH'*

Voltage Protection *bAtProct*
 Voltage Protection High *SEtdCHi*
 Voltage Protection Low *SEtdCLo*
 Scan Type *SCANtYP*
 Backlight Color *CoLoR*
 Backlight Brightness *br, 9Ht*
 ▲/▼ Keys Setting *UP dn*
 Dw Setting *dJLl*
 Reset *rESEt*

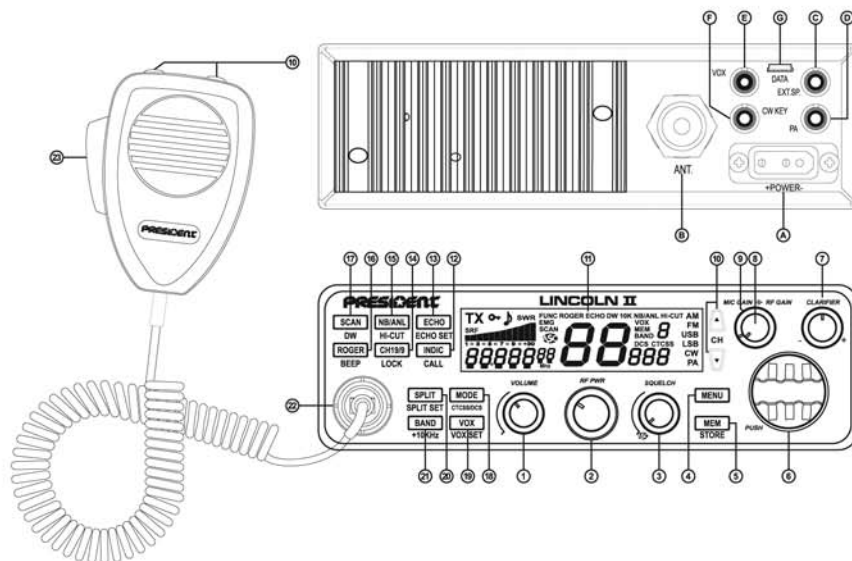

- 1) ON/OFF ~ VOLUME
- 2) RF POWER
- 3) ASC (Automatic Squelch Control) ~ SQUELCH
- 4) MENU
- 5) MEM ~ STORE
- 6) ROTARY "PUSH" KNOB
- 7) CLARIFIER
- 8) RF GAIN
- 9) MIC GAIN
- 10) ▲/▼ CHANNEL/FREQUENCY SELECTOR
- 11) LCD
- 12) INDIC ~ CALL
- 13) ECHO ~ ECHO SET
- 14) CH9/19 ~ LOCK
- 15) NB/ANL ~ HI-CUT

- 16) ROGER ~ BEEP
- 17) SCAN ~ DW
- 18) MODE ~ CTCSS/DCS
- 19) VOX ~ VOX SET
- 20) SPLIT ~ SPLIT SET
- 21) BAND ~ +10KHz
- 22) 6 PIN MICROPHONE PLUG
- 23) PTT
- A) DC-POWER TERMINAL (13,2 V)
- B) ANTENNA CONNECTOR (SO-239)
- C) EXTERNAL SPEAKER JACK (8 Ω, Ø 3,5 mm)
- D) JACK FOR OPTIONAL PA (Public Address) (Ø 3.5 mm)
- E) JACK FOR OPTIONAL VOX MIKE (Ø 2.5 mm)
- F) JACK FOR CW DEVICE (Ø 3.5 mm)
- G) USB DATA

1407/11-13 - C0301b

1) GENERAL

- Modulation modes : AM / FM / USB / LSB / CW
- Frequency ranges : from 28.000 MHz to 29.700 MHz
- Antenna impedance : 50 ohms
- Power supply : 13.2 V
- Dimensions (in mm) : 170 (W) x 250 (D) x 52 (H)
- Weight : 1,4 kg
- Accessories supplied : microphone UP/DOWN with support, mounting cradle, crews and fused power cord

2) TRANSMISSION

- Frequency allowance : +/- 300 Hz
- Carrier power : 12 W AM / 28 W FM / 31 W USB-LSB (PEP) / 12 W CW
- Trans. interference : inferior to - 50 dBc
- Audio response : 300 Hz to 3 KHz in AM/FM/USB/LSB
- Emitted power in the adj. channel : inferior to 20 µW
- Microphone sensitivity : 3.0 mV
- Drain : 6 A (with modulation)
- Modulated signal distortion : 2 %

3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.7 µV - 110 dBm (AM)
0.35 µV - 116 dBm (FM)
0.28 µV - 118 dBm (USB/LSB/CW)
- Frequency response : 300 Hz to 3 kHz in AM/FM/LSB/USB
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2 µV - 120 dBm
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequ. rejection rate : 70 dB
- Drain : 400 mA nominal / 600 mA max.

Specifications

