
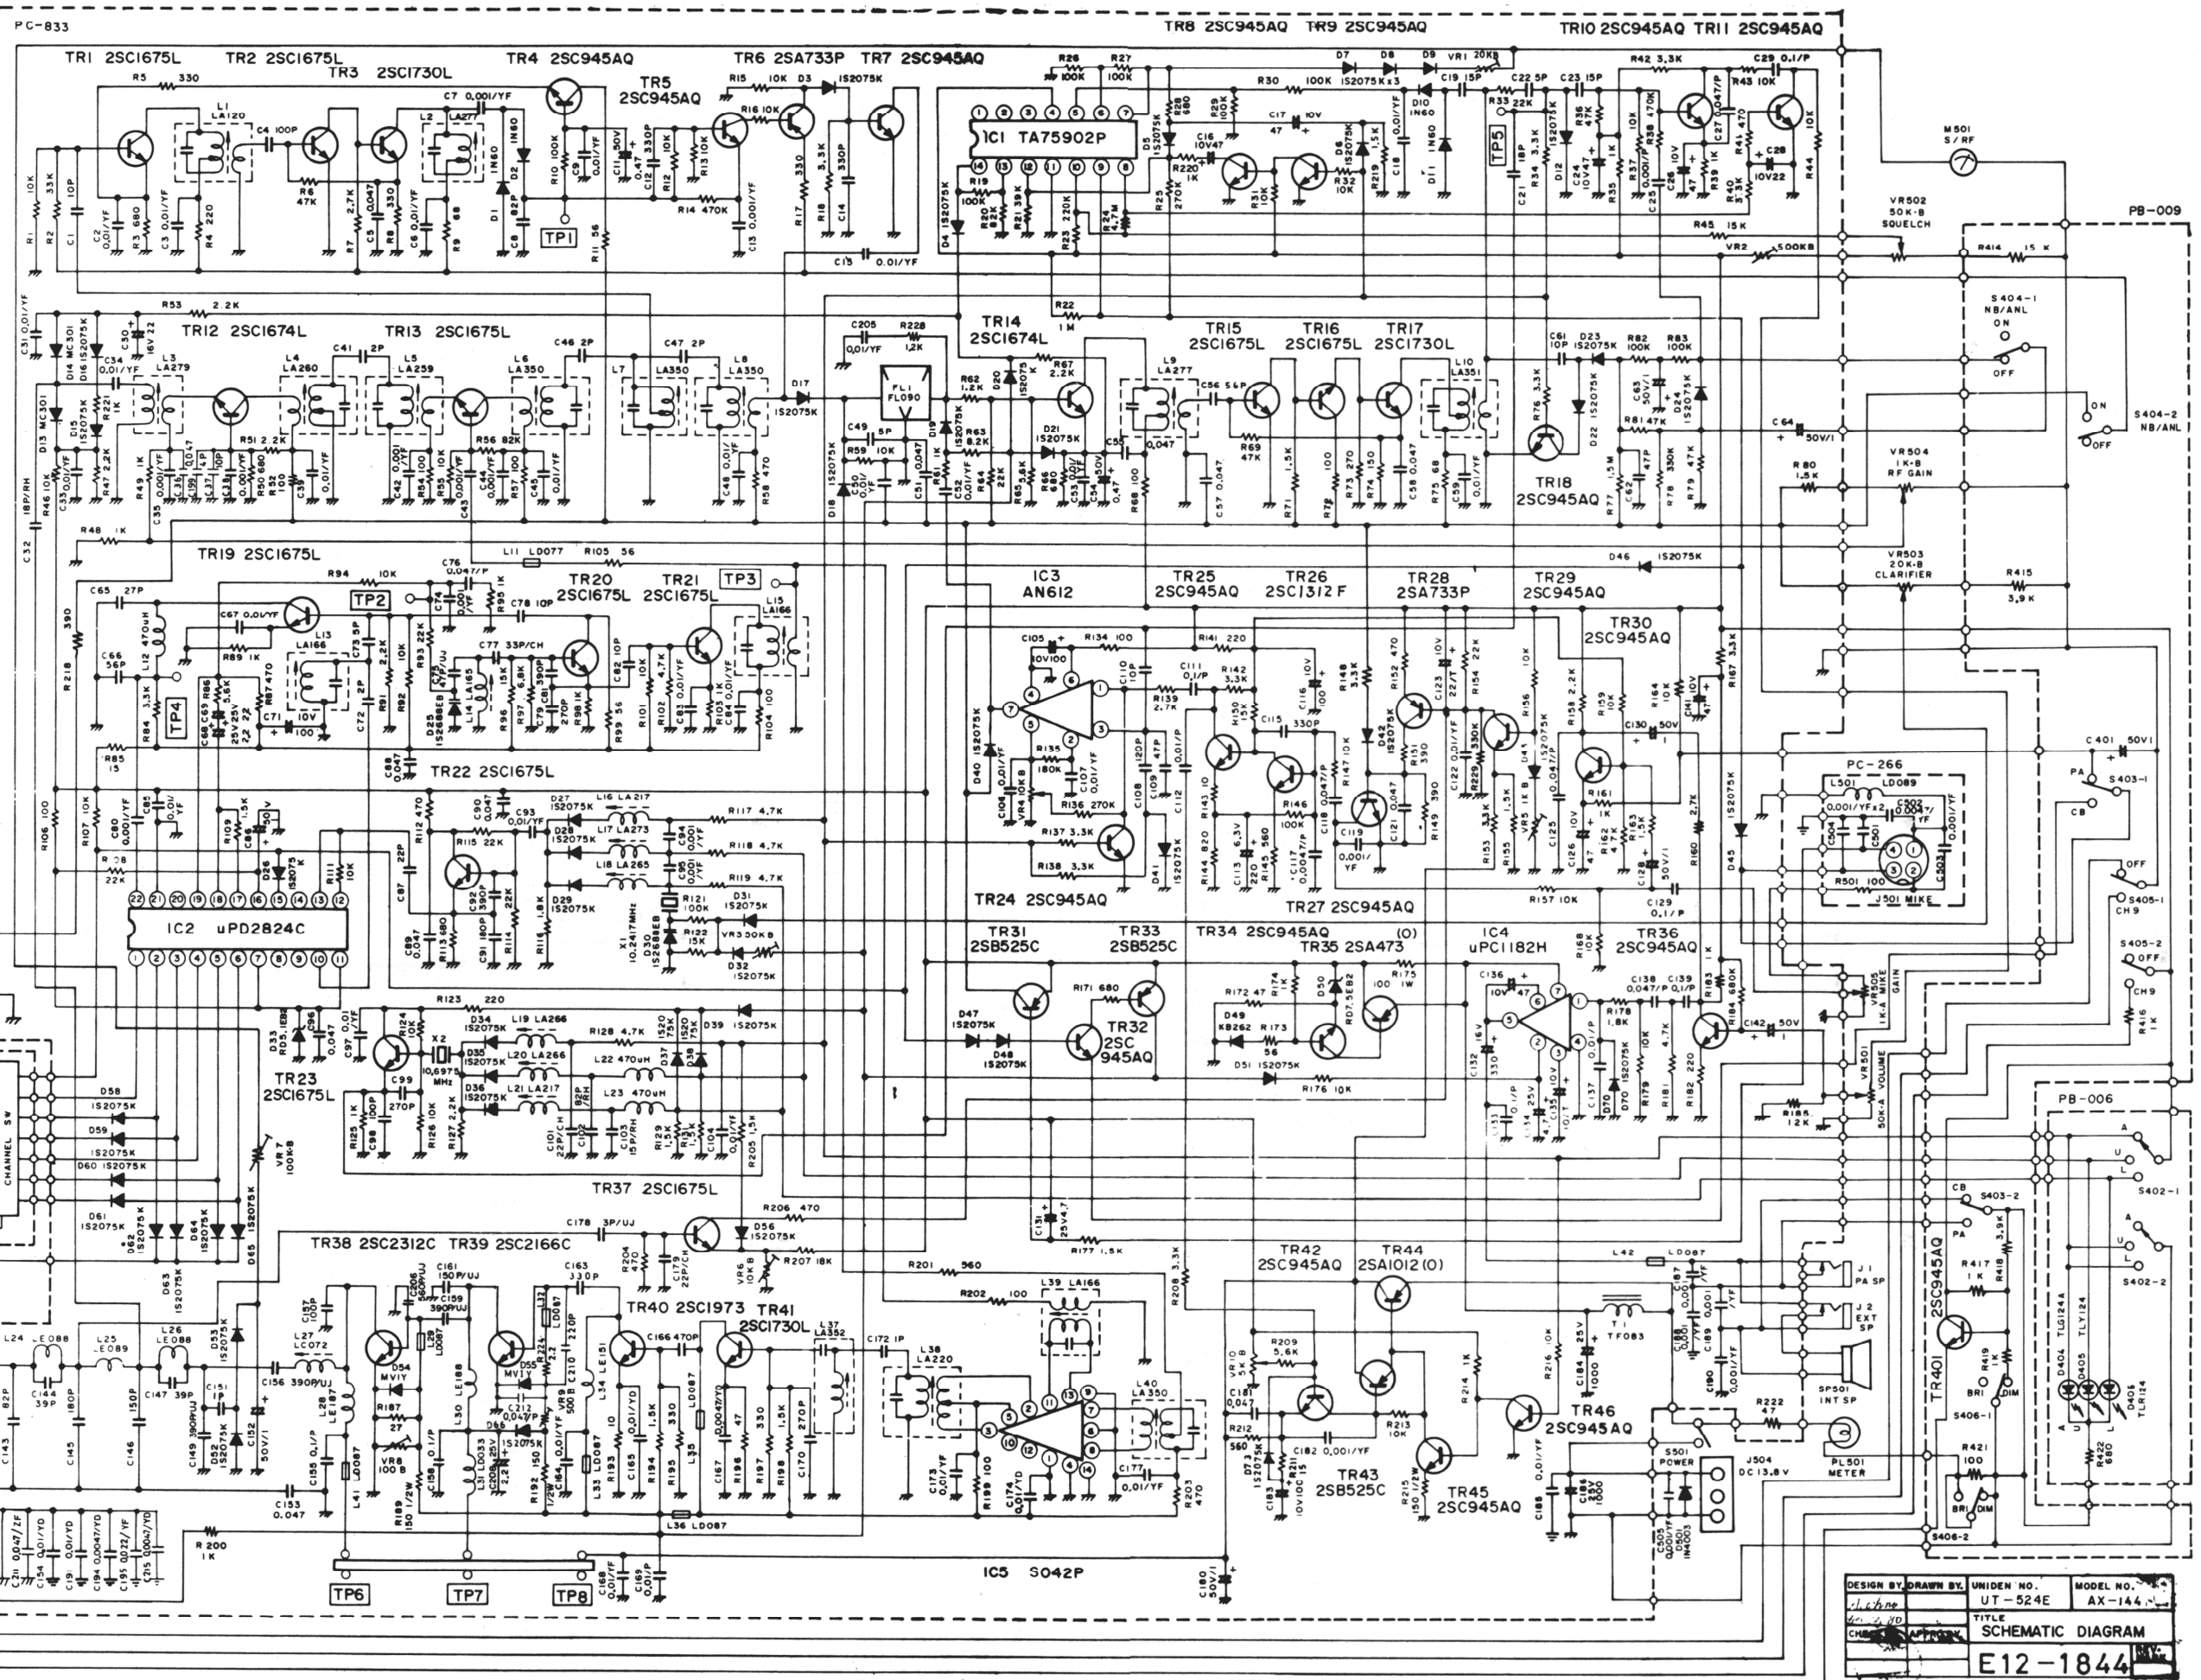
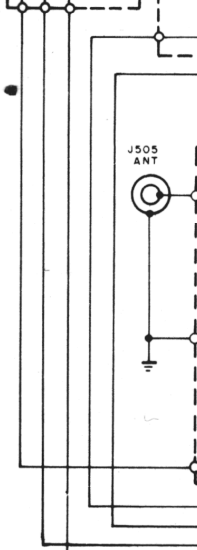



NOTES
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=10³ OHM, M=10⁶ OHM)
2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.
3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED.
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SLICLESS THAN 100PPM OR
5. IF MORE THAN 100PPM, UNLESS OTHERWISE NOTED.

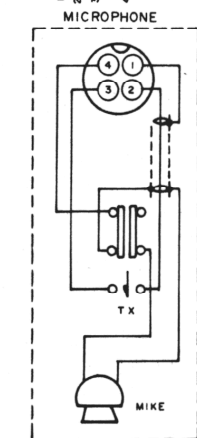

DESIGN BY	DRAWN BY	UNIDEN NO.	MODEL NO.
UT-524E	AX-144		
TITLE		SCHEMATIC DIAGRAM	
E12-1844			